




Maße in mm

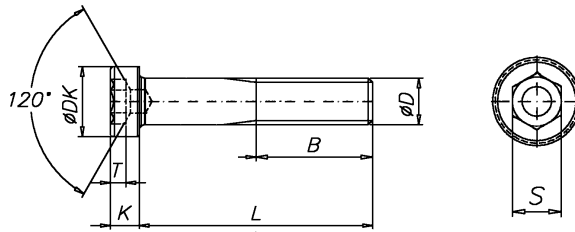

D	M4	M5	M6	M8	M10	M12	M14	M16	M20	M24
P <sup>1)</sup>	0,7	0,8	1	1,25	1,5	1,75	2	2	2,5	3
B <sup>2)</sup>	14	16	18	22	26	30	34	38	46	54
B <sup>3)</sup>	0	0	0	0	32	36	40	44	52	60
B <sup>4)</sup>	0	0	0	0	0	0	0	57	65	73
DK	7	8,5	10	13	16	18	21	24	30	36
K	2,8	3,5	4	5	6,5	7,5	8,5	10	12	14
S	3	4	5	6	8	10	12	14	17	19
T	1,6	2	2,5	3	3,5	4	4,5	5,5	6,5	7

<sup>1)</sup> Gewindesteigung

<sup>2)</sup> B für 125 < L ≤ 200

<sup>3)</sup> B für L ≤ 125

<sup>4)</sup> B für L > 200

VPE

L \ D	M4	M5	M6	M8	M10	M12	M14	M16	M20	M24
6	500	–	–	–	–	–	–	–	–	–
8	500	500	500	–	–	–	–	–	–	–
10	500	500	500	200	–	–	–	–	–	–
12	500	500	500	200	100	–	–	–	–	–
14	500	500	500	200	–	–	–	–	–	–
16	500	500	500	200	100	100	–	–	–	–
18	500	500	500	200	100	–	–	–	–	–
20	500	500	200	200	100	100	–	50	–	–
22	–	500	200	200	100	–	–	–	–	–
25	500	200	200	200	100	100	50	50	–	–
30	500	200	200	200	100	100	50	50	25	–
35	500	200	200	200	100	100	50	50	25	–
40	200	200	200	200	100	100	50	50	25	–
45	200	200	200	200	100	100	50	50	25	25
50	200	200	200	200	100	100	50	50	25	25
55	–	–	200	200	100	100	–	50	25	25
60	–	200	200	200	100	100	50	50	25	25
65	–	–	200	200	100	100	–	50	25	–
70	–	–	200	200	100	100	50	50	25	25
75	–	–	200	200	100	100	–	50	25	–
80	–	–	200	200	100	100	50	50	25	25
90	–	–	200	200	100	100	50	50	25	25
100	–	–	200	100	100	50	50	50	25	25
110	–	–	200	100	100	50	–	50	25	–
120	–	–	200	100	100	50	–	50	25	25
130	–	–	–	–	50	–	–	50	25	–
140	–	–	–	–	50	50	–	50	25	–
150	–	–	–	–	–	50	–	50	25	–
160	–	–	–	–	–	–	–	50	25	–
180	–	–	–	–	–	–	–	50	25	–
200	–	–	–	–	–	–	–	50	25	–

Die handelsüblichen Größen sind durch Angabe der VPE gekennzeichnet.  
Lagerhaltig in Güte: 8.8, 10.9 sowie Edelstahl A2 und Edelstahl A4

